

TELECRANE

Industrial Radio Remote Control

F21 Series



F21-2S/2D

F21-4S/4D

F21-E1

F21-4SB

F21-E1B

Features

Low Power Consumption(Eco-Friendly)

2 AA Size Batteries last up 2 months in regular operation.

Enclosure Durability(Harsh Environment)

Nylon-Fiber made housing for extra shock resistant.

Windows Software

Programmable function setting through PC.

Pre-Wiring Receiver

Receiver pre-installed wire made the installation easy and fast ever.



F21-2S(S)







F21 Series SPEC.	
Emission Power	<10mW
ID Code	4.3 billion(32 bits)
Operating Temp.	-35~80°C
Enclosure	Nylon Fiber
Operating Distance	Up to 100M
Transmitter Power	2 AA size Batteries

F21-2/4/E1/E1B Transmitter		
Model	Weight	Dimension
F21-2S/2D	120g	130x45x22mm
F21-4/E1	265g	156x61x51mm
F21-4SB/E1B	380g	164x75x46mm
F21-2/4/E1/E1B Receiver		
F21-2/4/E1/E1B	550g(w/o cable)	185x85x85mm
F21-2S(S)	352g(w/o cable)	84x82x48mm

TELECRANE

Industrial Radio Remote Control

F21 Series

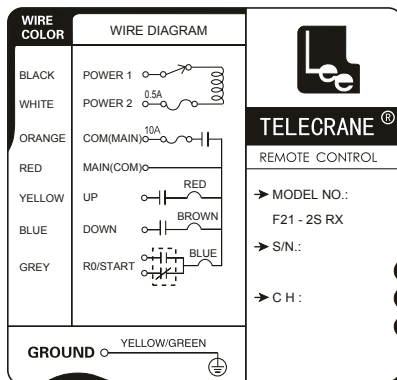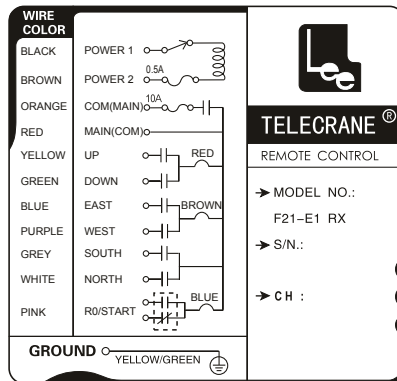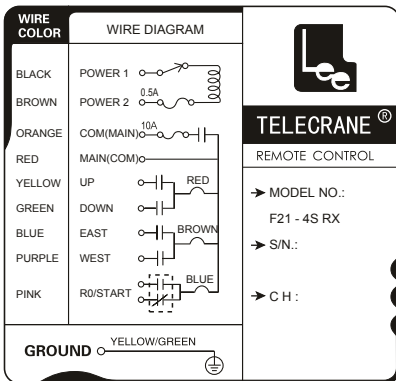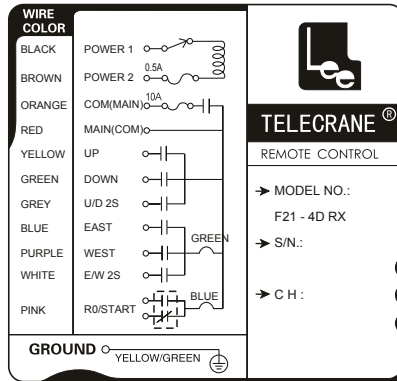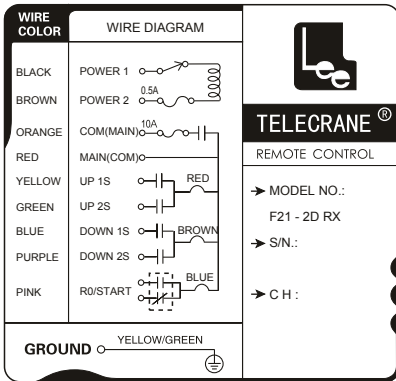

ACCESSORIES



Copier



Passive Antenna



Tx Protective Cover



Battery Charger



ARCO CONTROL

☎ :051-37133855-6

☎ :09014284236

WWW.ARCOKALA.COM

This PDF document was edited with Icecream PDF Editor.

Upgrade to PRO to remove watermark.



E-mail: telecrane@telecrane.com.tw

www.telecrane.com.tw

PH: +886-7-812-5652

Fax: +886-7-812-5704